


Catalog No	Capacity	Mounting Class	Carriage Width	Opening Range (mm)	Opening Range (mm)	Fork Dimensions (mm)	Effective Thickness (mm)	Horizontal Centre of Gravity (mm)	Weight
	kg/mm	ISO 2328	CW	OR¹	OR²	X / Y / Z	ET	HCG	kg
020CFR-B3BGJ	2000/500	2A	1100	350-1650	600-1880	100 / 40 / 1200	180	348	900
020CFR-B3BGH	2000/500	2A	1200	500-1850	600-2080	100 / 40 / 1200	180	348	910
023CFR-B48GJ	2300/500	3A	1100	350-1850	600-1768	120 / 50 / 1200	189	350	915
023CFR-B48GH	2300/500	3A	1200	500-1850	600-1780	120 / 50 / 1200	189	350	920
028CFR-B58GK	2800/600	3A/4A	1300	500-2050	600-1780	120 / 50 / 1200	189	356	925
028CFR-B58GT	2800/600	3A/4A	1400	500-2150	600-1780	120 / 50 / 1200	189	356	950

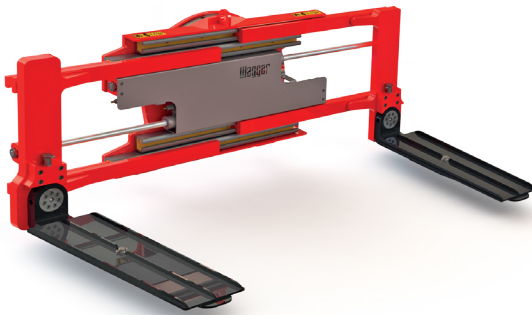

Technical Information

It is used for loading, unloading, and stacking cotton and wool bales. Also you can use it as a fork clamp.

Attachment rotates hydraulically by 360° endless in both directions.

Bale Clamp pads are included.

2 hydraulic functions

Non-Sideshifting

Optional Parts;

Quick Release Hooks

Pressure Gauge

Hoses & Jack Set