


Catalog No	Capacity	Mounting Class	Carriage Width	Opening Range (mm)	Fork Dimensions (mm)	Effective Thickness (mm)	Horizontal Centre of Gravity (mm)	Weight
	kg/mm	ISO 2328	FW	OR	FW / FT / FL	ET	HCG	kg
020CPR-A02GR	2000/500	2A	1100	450-1700	100 / 40 / 1200	343	279	625
020CPR-A03GR	2000/500	2A	1200	550-1900	100 / 40 / 1200	343	281	635
023CPR-B04GR	2300/500	3A	1100	450-1700	120 / 50 / 1200	353	283	685
023CPR-B06GR	2300/500	3A	1200	550-1900	120 / 50 / 1200	353	285	695
028CPR-B07GR	2800/600	3A/4A	1300	550-2000	120 / 50 / 1200	363	265	760
028CPR-B08GR	2800/600	3A/4A	1400	550-2100	120 / 50 / 1200	363	265	785

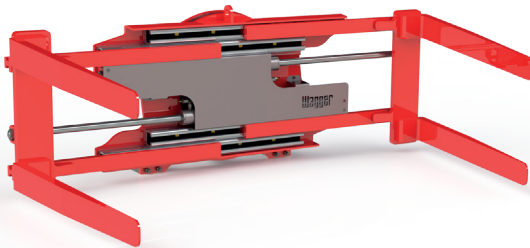

Technical Information

It is used for loading, and inverting load pallets.
Attachment rotates hydraulically by 360° endless in both directions.
2 hydraulic functions
Forks are including
Non-Sideshifting
Hoses & Jack Set