


Catalog No	Capacity	Mounting Class	Carriage Width	Opening Range (mm)	Fork Dimensions (mm)	Effective Thickness (mm)	Horizontal Centre of Gravity (mm)	Weight
	kg/mm	ISO 2328	FW	OR	FW / FT / FL	ET	HCG	kg
020CPT-A02GJ	2000/500	2A	1100	350-1650	100 / 40 / 1200	343	279	625
020CPT-A03GJ	2000/500	2A	1200	500-1850	100 / 40 / 1200	343	281	635
023CPT-B04GJ	2300/500	3A	1100	350-1850	120 / 50 / 1200	351	283	685
023CPT-B06GJ	2300/500	3A	1200	500-1850	120 / 50 / 1200	351	285	695
028CPT-B07GJ	2800/600	3A/4A	1300	500-2050	120 / 50 / 1200	360	265	760
028CPT-B08GJ	2800/600	3A/4A	1400	500-2150	120 / 50 / 1200	360	265	785

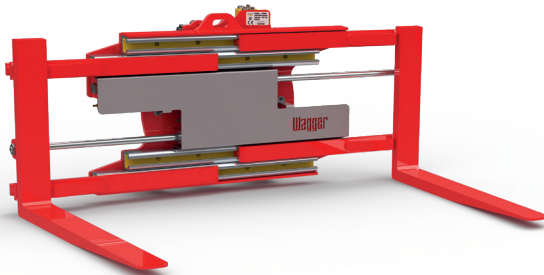

#### Technical Information

It is used for adjusting forks expanding or closing according to different pallet sizes.

Attachment rotates hydraulically by 360° endless in both directions.

2 hydraulic functions

Forks are including

Non-Sideshifting

Hoses & Jack Set