


Catalog No	Capacity@ Load Centre	Carriage Width (mm)	Mounting Class	Opening Range (mm)	Fork Carrier Width (mm)	Sideshift Stroke (mm)	Effective Thickness (mm)	Horizontal Centre of Gravity (mm)	Weight
	kg@mm	CW	ISO 2328	OR(ITI)	FCW	S1+S2	ET	HCG	kg
020FPMs-A1150	2000@500	1100	2A	65-825	100	200	158	101	167
025FPMs-A1150	2500@500	1150	2A	65-875	100	200	158	101	170
035FPMs-B1200	3500@500	1200	3A	80-965	125	200	184	116	242
035FPMs-B1250	3500@500	1250	3A	80-915	125	200	184	116	246
035FPMs-B1300	3500@500	1300	3A	80-965	125	200	184	116	250
045FPMs-B1250	4500@500	1250	3A	95-965	125	200	205	124	336
045FPMs-B1300	4500@500	1300	3A	95-915	125	200	205	124	340
045FPMs-B1350	4500@500	1350	3A	95-965	125	200	205	124	345

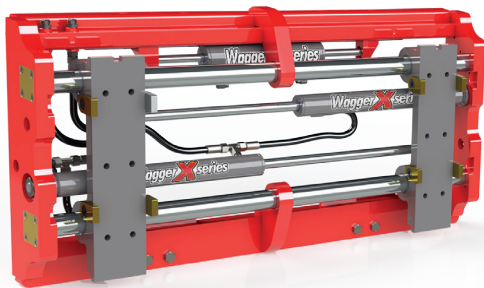

#### Technical Information

You may use it to position forks for a pallet dimension.  
 2 hydraulic functions  
 With separate Sideshift  
 Load Backrest and forks are optional parts.