


Catalog No	Capacity@ Load Centre	Carriage Width (mm)	Mounting Class	Opening Range (mm)	Fork Dimensions (mm)	Effective Thickness (mm)	*Horizontal Centre of Gravity (mm)	Weight
	kg@mm	CW	ISO 2328	OR	FW/FT/FL	ET	HCG	kg
020FPR-A1000	2000@500	1000	2A	61-777	80/40/1100	338	294	467
020FPR-A1100	2000@500	1100	2A	61-827	80/40/1100	338	294	475
025FPR-A1500	2500@500	1150	2A	61-877	100/45/1200	338	294	485
035FPR-B1200	3500@500	1200	3A	71-927	120/50/1200	353	305	510
035FPR-B1250	3500@500	1250	3A	71-977	120/50/1200	353	305	520
035FPR-B1300	3500@500	1300	3A	71-1027	120/50/1200	353	305	530
045FPR-B1300	4500@500	1300	3A	81-1077	150/50/1200	372	300	560
045FPR-B1350	4500@500	1350	3A	81-1127	150/50/1200	372	300	575

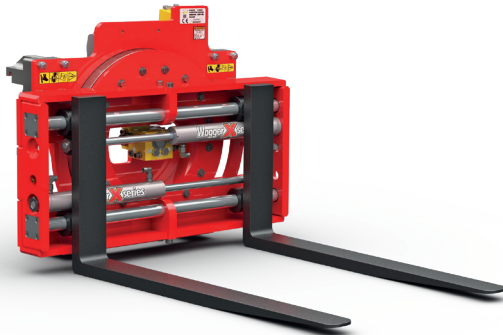

Technical Information

- has continuous 360° rotation in both directions
- 2 hydraulic functions
- Non-Sideshifting
- Load Backrest and forks are optional parts.