


Catalog No	Capacity@ Load Centre kg@mm	Carriage Width (mm) CW	Mounting Class ISO 2328	Opening Range (mm) OR	Fork Carrier Width (mm) FCW	Sideshift Stroke (mm) S	Effective Thickness (mm) ET	Horizontal Centre of Gravity (mm) HCG	Weight kg
020FZNs-A1100	2000@500	1100	2A	80-945	160	100	124	76	135
025FZNs-A1150	2500@500	1150	2A	80-995	160	100	124	76	138
035FZNs-B1200	3500@500	1200	3A	115-1035	205	100	135	82	177
035FZNs-B1250	3500@500	1250	3A	115-1085	205	100	135	82	181
035FZNs-B1300	3500@500	1300	3A	115-1135	205	100	135	82	186
045FZNs-B1250	4500@500	1250	3A	115-1085	205	100	146	166	235
045FZNs-B1300	4500@500	1300	3A	115-1135	205	100	146	166	240
045FZNs-B1350	4500@500	1350	3A	115-1185	205	100	146	166	245

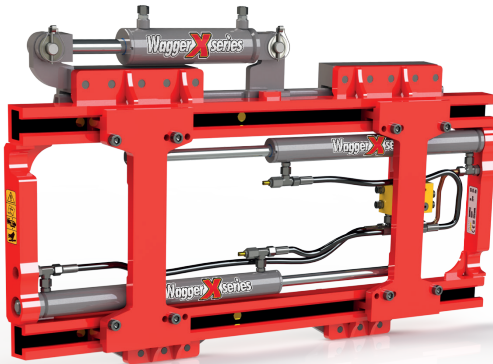

#### Technical Information

You may use it to position forks for a pallet dimension.  
 2 hydraulic functions  
 With separate Sideshift  
 Load Backrest and forks are optional parts.