


Catalog No	Capacity	Mounting Class	Carriage Width	Opening Range (mm)	Arm Dimensions (mm)	Load Backrest Dimensions (mm)	Effective Thickness (mm)	Horizontal Centre of Gravity (mm)	Weight
	kg/mm	ISO 2328	FW	OR	AW/AH/AL	(LBW / LBH)	ET	HCG	kg
016BFP-A17GF	1600/500	2A/3A	1200	400-1700	220/235/1220	1100/400	222	357	780
020BFP-A17GF	2000/500	2A/3A	1300	400-1800	220/235/1220	1200/400	225	360	800
023BFP-B17GF	2300/500	3A	1300	400-1800	220/235/1220	1200/400	230	357	820
026BFP-B17GF	2600/500	3A/4A	1300	400-1800	220/235/1220	1200/400	230	357	825
028BFP-B17GF	2800/500	3A/4A	1300	400-1800	220/235/1220	1200/400	235	262	850

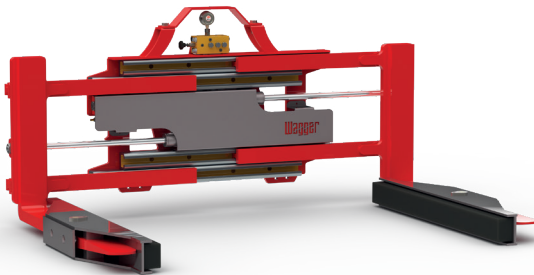

### Technical Information

It is used for loading, unloading or stacking bricks & blocks  
 2 hydraulic functions  
 Valve-Block sideshifting is available.  
 Optional Parts:  
 Quick Release Hooks  
 Load Backrest (300mm)  
 Pressure Gauge  
 Hoses & Jack Set