


Catalog No	Capacity	Mounting Class	Carriage Width	Opening Range (mm)	Arm Dimensions (mm)	Load Backrest Dimensions (mm)	Effective Thickness (mm)	Horizontal Centre of Gravity (mm)	Weight
	kg/mm	ISO 2328	FW	OR	AW/AH/AL	(LBW / LBH)	ET	HCG	kg
016BSP-A17GS	1600/500	2A/3A	1200	250-1750	190/160/1220	1100/400	120	410	665
020BSP-A18GS	2000/500	2A/3A	1200	250-1750	190/160/1220	1100/400	120	413	660
023BSP-B18GS	2300/500	3A	1200	250-1750	190/160/1220	1100/400	120	413	665
026BSP-B18GS	2600/500	3A/4A	1200	250-1750	190/160/1220	1100/400	125	415	670
028BSP-B18GS	2800/500	3A/4A	1200	250-1750	190/160/1220	1100/400	125	415	675

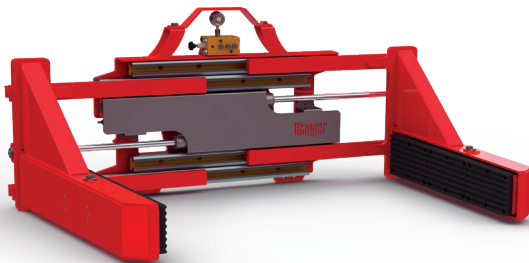

Technical Information

It is used for loading, unloading or stacking bricks & blocks
 2 hydraulic functions
 Valve-Block sideshifting is available.
 Optional Parts:
 Quick Release Hooks
 Load Backrest (300mm)
 Pressure Gauge
 Hoses & Jack Set