


Catalog No	Capacity@ Load Centre	Mounting Class	Carriage Width (mm)	Opening Range (mm)	Arm Dimensions (mm)	Effective Thickness (mm)	Horizontal Centre of Gravity (mm)	Weight
	kg/mm				ISO 2328			
010CBA-A01GI	1000/500	2A	950	400-1350	1000/350/530/30	97	263	410
010CBA-A02GI	1000/500	2A	1100	450-1550	1000/350/530/30	97	261	420
010CBA-A03GI	1000/500	2A	1200	500-1700	1000/350/530/30	97	260	430
014CBA-A04GI	1400/500	2A	1000	400-1600	1000/350/530/30	111	254	447
014CBA-A05GI	1400/500	2A	1100	450-1650	1000/350/530/30	111	254	453
014CBA-A07GI	1400/500	2A	1200	500-1800	1000/350/530/30	111	249	474
014CBA-A09GI	1400/500	2A	1300	550-2100	1000/350/530/30	111	243	481
020CBA-A05GI	2000/500	2A	1200	450-1850	1000/350/530/30	123	225	512
020CBA-A06GI	2000/500	2A	1200	500-1900	1000/350/530/30	123	225	513
020CBA-A09GI	2000/500	2A	1300	550-2100	1000/350/530/30	123	223	521
023CBA-B04GI	2300/500	2A/3A	1200	450-1850	1000/450/530/30	123	250	550
023CBA-B05GI	2300/500	2A/3A	1300	500-2000	1000/450/530/30	123	253	565
023CBA-B09GI	2300/500	2A/3A	1300	550-2100	1000/450/530/30	123	253	565
023CBA-B19GI	2300/500	2A/3A	1300	600-2200	1000/450/530/30	123	253	565
023CBA-B17GI	2300/500	2A/3A	1300	800-2450	1000/450/530/30	123	553	570
023CBA-B07GI	2300/500	2A/3A	1550	500-2250	1000/450/530/30	123	227	610
023CBA-B07GI	2300/500	2A/3A	1630	500-2350	1000/450/530/30	123	230	650
026CBA-B05GI	2600/500	3A	1300	500-2000	1000/450/530/30	131	250	575

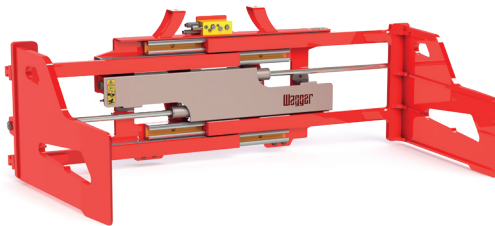

Technical Information

It is used for loading, unloading or stacking recycling bales
 2 hydraulic functions
 Valve Block sideshifting is available.
 Optional Parts:
 Quick Release Hooks
 Load Backrest (300mm)
 Pressure Gauge
 Per 100mm Arm extension
 Hoses & Jack Set