


Catalog No	Capacity@ Load Centre	Mounting Class	Carriage Width (mm)	Opening Range (mm)	Opening Range 90° (mm)	Fork Dimensions (mm)	Effective Thickness (mm)	Horizontal Centre of Gravity (mm)	Weight
	kg/mm	ISO 2328	CW	OR 1	OR 2	AL / AH / L / AT	ET	HCG	kg
020CFP-B30GJ	2000/500	2A/3A	1200	270-1650	600-1980	120 / 50 / 1200	121	228	520
020CFP-B32GJ	2000/500	2A/3A	1300	270-1750	600-2080	120 / 50 / 1200	121	228	525
026CFP-B34GJ	2600/500	2A/3A	1200	270-1650	600-1980	120 / 50 / 1200	125	230	535
026CFP-B36GJ	2600/500	2A/3A	1300	270-1750	600-1980	120 / 50 / 1200	125	230	540

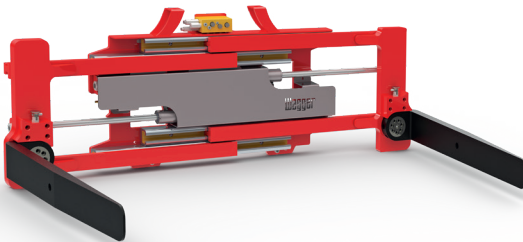

Technical Information

It is used for loading, unloading, and stacking cotton and wool bales. Also you can use it as a fork clamp.

2 hydraulic functions

Valve Block sideshifting is available.

Optional Parts;

Quick Release Hooks

Load Backrest (300mm)

Pressure Gauge

Hoses & Jack Set