


| Catalog No | Capacity@ Load Centre | Mounting Class | Carriage Width (mm) | Opening Range (mm) | Arm Dimensions (mm) | Effective Thickness (mm) | Horizontal Centre of Gravity (mm) | Weight |
|--------------|--------------------------|-------------------|------------------------|-----------------------|---------------------------|--------------------------------|---|--------|
| | kg/mm | | | | ISO 2328 | | | |
| 014CSA-A04GI | 1400/500 | 2A | 1000 | 400-1600 | 1000/350/530/30 | 111 | 254 | 447 |
| 014CSA-A05GI | 1400/500 | 2A | 1100 | 450-1650 | 1000/350/530/30 | 111 | 254 | 453 |
| 014CSA-A07GI | 1400/500 | 2A | 1200 | 500-1800 | 1000/350/530/30 | 111 | 249 | 474 |
| 014CSA-A09GI | 1400/500 | 2A | 1300 | 550-2100 | 1000/350/530/30 | 111 | 243 | 481 |
| 020CSA-A05GI | 2000/500 | 2A | 1200 | 450-1850 | 1000/350/530/30 | 123 | 225 | 512 |
| 020CSA-A06GI | 2000/500 | 2A | 1200 | 500-1900 | 1000/350/530/30 | 123 | 225 | 513 |
| 020CSA-A09GI | 2000/500 | 2A | 1300 | 550-2100 | 1000/350/530/30 | 123 | 223 | 521 |
| 023CSA-B04GI | 2300/500 | 2A/3A | 1200 | 450-1850 | 1000/450/530/30 | 123 | 250 | 550 |
| 023CSA-B05GI | 2300/500 | 2A/3A | 1300 | 500-2000 | 1000/450/530/30 | 123 | 253 | 565 |
| 023CSA-B09GI | 2300/500 | 2A/3A | 1300 | 550-2100 | 1000/450/530/30 | 123 | 253 | 565 |
| 023CSA-B19GI | 2300/500 | 2A/3A | 1300 | 600-2200 | 1000/450/530/30 | 123 | 253 | 565 |
| 023CSA-B17GI | 2300/500 | 2A/3A | 1300 | 800-2450 | 1000/450/530/30 | 123 | 553 | 570 |
| 023CSA-B07GI | 2300/500 | 2A/3A | 1550 | 500-2250 | 1000/450/530/30 | 123 | 227 | 610 |
| 023CSA-B07GI | 2300/500 | 2A/3A | 1630 | 500-2350 | 1000/450/530/30 | 123 | 230 | 650 |
| 026CSA-B05GI | 2600/500 | 3A | 1300 | 500-2000 | 1000/450/530/30 | 131 | 250 | 575 |
| 026CSA-B09GI | 2600/500 | 3A | 1300 | 550-2100 | 1000/450/530/30 | 131 | 250 | 578 |
| 026CSA-B19GI | 2600/500 | 3A | 1300 | 600-2200 | 1000/450/530/30 | 131 | 250 | 580 |
| 026CSA-B17GI | 2600/500 | 3A | 1300 | 750-2450 | 1000/450/530/30 | 131 | 250 | 585 |
| 026CSA-B07GI | 2600/500 | 3A | 1550 | 500-2250 | 1000/450/530/30 | 131 | 263 | 650 |
| 026CSA-B07GI | 2600/500 | 3A | 1630 | 550-2350 | 1000/450/530/30 | 131 | 265 | 670 |

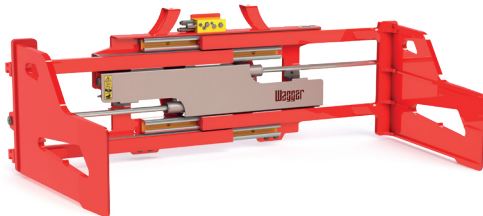

Technical Information

It is used for loading, unloading or stacking cellulose bales
 2 hydraulic functions
 Sideshift function is available.
 Optional Parts:
 Quick Release Hooks
 Load Backrest (300mm)
 Pressure Gauge
 Per 100mm Arm extension
 Hoses & Jack Set