


Catalog No	Capacity@ Load Centre	Mounting Class	Carriage Width (mm)	Opening Range (mm)	Arm Dimensions (mm)	Effective Thickness (mm)	Horizontal Centre of Gravity (mm)	Weight
	kg/mm	ISO 2328	CW	OR	AL / AH / L / AT	ET	HCG	kg
014CTC-A04GI	1400/500	2A	1000	400-1600	1000/350/530/30	111	254	400
014CTC-A05GI	1400/500	2A	1100	450-1650	1000/350/530/30	111	254	410
023CTC-B04GI	2300/500	2A/3A	1200	450-1850	1000/450/530/30	123	250	510
023CTC-B05GI	2300/500	2A/3A	1300	500-2000	1000/450/530/30	123	253	520
023CTC-B09GI	2300/500	2A/3A	1300	550-2100	1000/450/530/30	123	253	525
026CTC-B05GI	2600/500	3A	1300	500-2000	1000/450/530/30	131	250	535
026CTC-B09GI	2600/500	3A	1300	550-2100	1000/450/530/30	131	250	538
026CTC-B19GI	2600/500	3A	1300	600-2200	1000/450/530/30	131	250	550

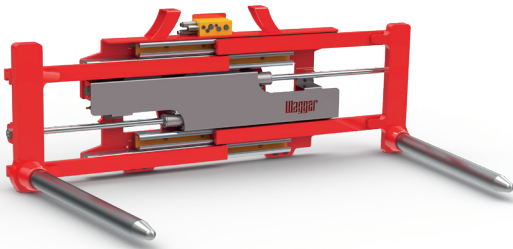

### Technical Information

It is used for loading, unloading or stacking Roll-type loads  
 2 hydraulic functions  
 Valve Block sideshifting is available.  
 Optional Parts:  
 Quick Release Hooks  
 Load Backrest (300mm)  
 Pressure Gauge  
 Hoses & Jack Set