


Catalog No	Capacity@Load Centre kg@mm	Carriage Width (mm) BW	Mounting Class ISO 2328	Opening Range (mm) OR	Effective Thickness (mm) ET	Horizontal Centre of Gravity (mm) HCG	Weight kg
020RBG-AI000	2000@500	1000	2A	80-820	215	157	285
025RBG-AI150	2500@500	1150	2A	80-870	215	157	296
030RBG-BI270	3000@500	1270	3A	95-875	228	164	370
035RBG-BI270	3500@500	1270	3A	95-945	228	171	407
045RBG-BI300	4500@500	1300	3A	84-950	210	145	620
045RBG-BI350	4500@500	1350	3A	84-1000	210	145	624
050RBG-CI400	5000@600	1400	4A	84-900	285	199	690
050RBG-CI450	5000@600	1450	4A	84-950	258	199	692
060RBG-CI500	6000@600	1500	4A	84-1000	258	199	698
060RBG-CI600	6000@600	1600	4A	84-1100	258	199	705
080RBG-CI800	8000@600	1800	4A	95-1300	236	112	1385
080RBG-C2000	8000@600	2000	4A	95-1450	236	110	1400
080RBG-DI800	8000@600	1800	5A	115-1390	286	125	2250
080RBG-D2000	8000@600	2000	5A	115-1390	286	128	2288

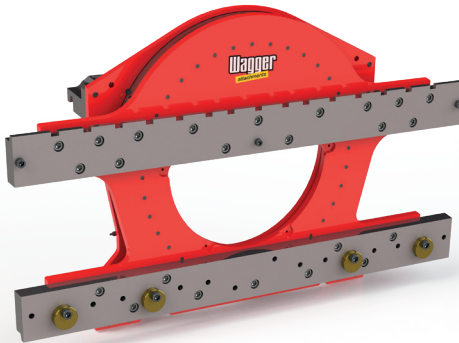

Technical Information

Has continuous 360° rotation in both directions
 1 hydraulic functions
 Sells without Forks. You may use forklift's own forks
 Forks are manually adjustable and can be locked in position.